


LED - Wall Pack - 18" Semi-Cut-Off Fixtures

70,000 HRS Life

The Next Generation of Lighting

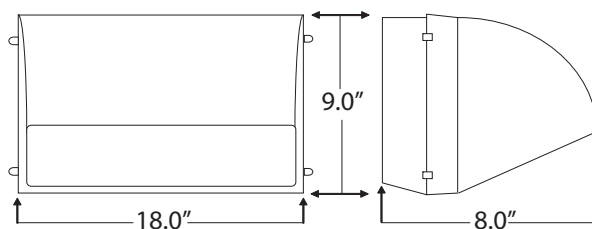

LED

Specification:

- LED Driver	Constant Current
- Start Method	InstantON
- Hot Re-start	InstantON
- Universal Input Line Voltage	120-277 VAC
- Input Line Frequency	50/60 Hz
- System Life	70,000 Hrs.
- Lumen Maintenance @50,000Hrs	>85%
- Color Temperature	5000°K
- Color Rendering Index (CRI)	>75
- Minimum Operating Temperature	- 40°F
- Maximum Ambient Temperature	125°F
- Power Factor	> 0.98
- Total Harmonic Distortion	< 10%
- Inrush Current Peak	< 10 Amp
- FCC Compliance	Part 18, Subp. C

Applications, Features, and Benefits

- Aluminum cast housing powder coated
- Heat and impact resistant glass diffuser/lens
- 70,000 hrs LED driver made with long life components
- InstantON(TM) flicker-free Cold Start and Hot Re-Start
- High Power Factor, Low THD Driver
- Concealed continuous gasket seals against harmful dust, dirt, moisture and insects
- IP-65 Rated for wet locations
- Up to 15 years Maintenance free operation
- Patented LED engine design with Advanced Thermal Management
- 5 Year Warranty

Product Information

Item No.	Description	Watts	Initial Lumens	Line Voltage Supply	Line Current	Total Harmonic Distortion (THD)	Power Factor	Packaging Dimensions		
								Width	Length	Height
LED-21080SCT	LED - Wall Pack - Semi Cut Type	80	6,400	120-277 VAC	0.69-0.30 Amp	<10%	0.98	12.0 in. 304 mm	20.0 in. 508 mm	11.0 in. 280 mm
LED-21100SCT	LED - Wall Pack - Semi Cut Type	100	8,000	120-277 VAC	0.87-0.37 Amp	<10%	0.98	12.0 in. 304 mm	20.0 in. 508 mm	11.0 in. 280 mm

** Optional Color Temperatures available: 3000°K, 4100°K

Fixture Weight = 28 lbs.

Ordering Information

(SAMPLE NUMBER : LED-21080SCT-UNV-LD-120V-BRZ)

Type LED	Series 21 = Wall Pack	Type SCT = Semi Cut-Off	Wattage 080 = 80W 100 = 100W	Voltage UNV = Universal	Accessories LD = Light Detector / Photocell * must verify operating voltage	Colors BRZ = Dark Bronze * custom colors available
--------------------	---------------------------------	-----------------------------------	---	-----------------------------------	--	---

NEPTUN Light, Inc.
Questions and Comments:
service@neptunlight.com
Toll-Free: 1-888-735-8330

NEPTUN
LIGHT®



© Copyright 2012
NEPTUN Light, Inc.

Spec. Rev. 1-2012